

# Stringlight Assembly Configurator

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Phone: \_\_\_\_\_  
 e-mail: \_\_\_\_\_

## Easy as 1-2-3

1. Fill in all information
2. Select grade & colors
3. Fax: 1-440-951-1867  
or  
Scan/e-mail:  
info@ericson.com

## Stringlight Assembly Configurator

Overall Length: \_\_\_\_\_  
 Primary (Lead) Length: \_\_\_\_\_  
 Secondary (Tail) Length: \_\_\_\_\_  
 Plug (ex: 1510-PW6P): \_\_\_\_\_  
 Connector (ex: 1610-CW6P): \_\_\_\_\_  
 Cable Size/Type (ex: #12/3 SEO): \_\_\_\_\_  
 (Note: Wire guards require ground wire)  
 Cable Color: \_\_\_\_\_  
 Total Number of Lamp Sockets: \_\_\_\_\_  
 Spacing between Sockets: \_\_\_\_\_

Lamp Guard Type (select from list below):  
 211    214    220    222-L    224  
 211-P    212    220-P    222-LP    224-P

## Grade of Stringlights

- Commercial Grade (STW 600V Cable & E-Lite Sockets)  
 Industrial Grade (Heavy Duty Sockets & SEOW 600V Cable)

### E-Lite Socket



- 150W Rated
- Medium Duty
- Good All Around Performance
- 1-1/2" Guard Collar Diameter

### Heavy Duty Socket



- 200W Rated
- Heavy Duty Rubberized Feel
- Great Low Temp Operation
- 1-3/4" Guard Collar Diameter

## Color



### E-Lite Style

- Black "T" with Yellow Cord  
 Black "T" with Black Cord

### Heavy Duty Style

- Yellow "T" With Yellow Cord  
 Black "T" With Black Cord  
 Yellow "T" With Black Cord  
 Black "T" With Black Cord

The drawing below is intended to serve as a reference tool to assist in the specification of your custom assembly.

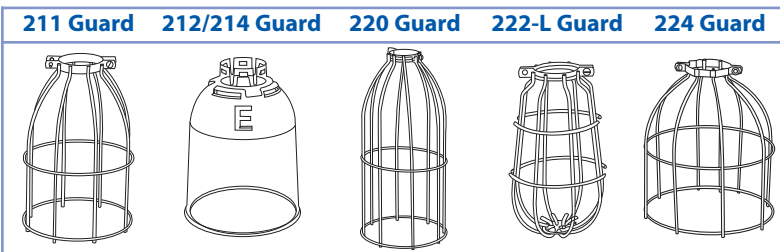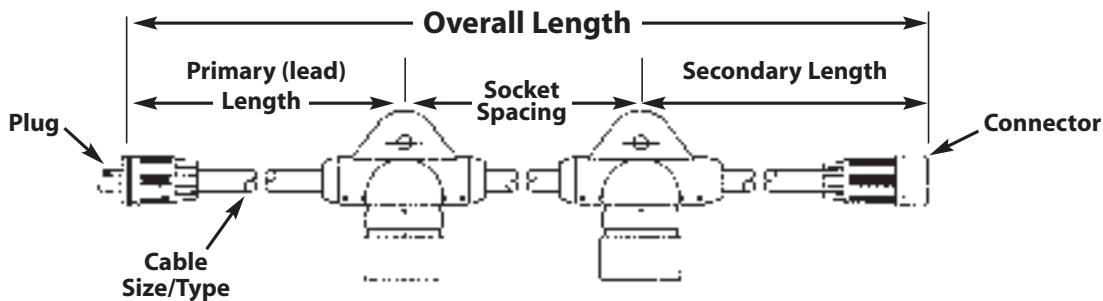

**Note:** Add "-P" to part number to indicate vinyl coated, grounded wire.  
 214 has a 1-3/4" diameter collar • 212 has a 1-1/2" diameter collar.

**\*A complete list of Factory Reps can be found on our website**

**Note:** NEC 590 does not allow the mixing of power & lighting taps on a single GFCI protected circuit.