



ERICSSON

SAFETY IS OUR STANDARD

Petrochemical Solutions

PETROCHEMICAL SOLUTIONS

Compact 50 Amp Distribution Box

- cETLus listed
- 50A input power
- Reduced operational footprint
- NEMA 3R in-use
- Multiple panel configurations available
- Patented design



e-Cart® 15-300 kVA

- cETLus listed
- 3Ø or 1Ø NEMA 3R 480V or 600V 60Hz ventilated transformer
- Heavy duty, light weight, spark resistant aluminum frame
- NEMA 3R fused primary disconnect switch



910 LED Hand Lamp

- Patent Pending / cULus listing pending
- Industrial grade, LED hand lamp
- Rated up to NEMA 6P
- 50,000 hr. lamp life
- Most components are serviceable in the field
- Designed for confined space applications



Low Voltage Explosion Proof LED String Lights

- cETLus listed
- Low voltage LED bulb
- Transformer - 120VAC 60Hz to 12VAC stepdown, rated 400VA
- Each receptacle supplies 10-drop LED stringlight
- Class I & II, Div 1 & 2, Groups C, D, F & G




XG2 Series Inline GFCI w/ XP plug

- Indoor/outdoor use: provides increased resistance to impact, heat, UV exposure.
- Features a water tight body.



PWDX All Weather, Heavy Duty, Wet Location Outlet Receptacle

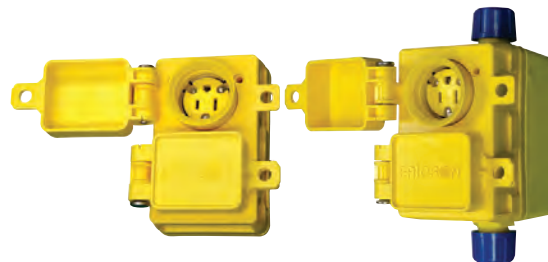

INDUSTRIAL LOCATION PRODUCTS

e-Cart[®] Jr. 15-30 kVA

- 15-25 kVA cETLus listed
- 1Ø (15, 25 kVA) 3Ø (30 kVA)
- 480V / 600V 3Ø or 1Ø 60Hz power input
- NEMA 3R rated main disconnect switch



e-Cart[®] XP 15-225 kVA

- NEMA 3R rated
- Class I, Div. 2, Groups C & D certified
- 480V or 600V main power flexibility



2600 Explosion Proof Hand Lamps & String Lights

- cETLus listed
- Class I & II, Div 1 & 2, Groups C, D, F and G
- Non-sparking aluminum guard
- Non-conductive, high impact glass reinforced handle
- Resistant to heat up to 300° F and withstands chemicals, acids, and chipping




Linear LED Tube String Light

- Patent Pending / cULus listing pending
- Industrial grade, LED string light
- NEMA 3R, 4X, and 6P rated
- Feed-thru connectivity
- Available in 200 and 360 degree beam angles
- Designed for confined space applications



TuffTraxx[®] Cable & Hose Protectors

- All weather, rugged, polyurethane construction
- NEC & OSHA compliant
- Up to 50,000 lbs. load capacity
- 3,4 and 5 slot channels available



Perma-Tite[®]2 Water Tight Wiring Devices

- UL listed / CSA certified
- Rated up to NEMA 6P
- Completely water tight wiring devices





1-800-ERICSON • ericson.com

L1000793A