



ERICSON

SAFETY IS OUR STANDARD



NUCLEAR POWER PLANT MAINTENANCE SOLUTIONS

NUCLEAR POWER PLANT MAINTENANCE SOLUTIONS

e-Cart® Jr. 15-30 kVA Power Transformer Unit

- cETLus listed
- Combo load center with GFCI protection
- Heavy duty welded metal frame
- Rated NEMA 3R in-use including main disconnect switch
- Can be plugged into 50 Amp welder receptacle
- 1Ø (15-25 kVA) or 3Ø (30 kVA) options
- Now stocking 1 and 3 phase 15kVA



60-200 Amp Distribution Cart

- cETLus listed
- Up to 200 Amp capacity or 400 Amp feed-thru
- NEMA 3R in-use
- Product customizations are available
- 3Ø or 1Ø options available
- 120Y208V, 120/240V, 480V, or 600V



Linear LED Tube String Light

- Select models cULus listed
- Low profile, streamlined design for easy insertion/extraction
- Industrial grade, designed for rugged environments
- NEMA 3R, 4X, and 6P rated
- Patent pending
- Feed-thru connectivity
- Available in 200 and 360 degree options
- Unique LED bulb provides theft deterrence



LED Hand Lamps

- Select models listed for U.S. and Canada
- Industrial grade, LED hand lamp
- Rated up to NEMA 6P
- 50,000 hr. lamp life
- Most components are serviceable in the field
- Designed for confined space applications



e-Cart® 30-300 kVA Power Transformer Unit

- cETLus listed
- Industrial duty aluminum frame with lifting eyes, wheels, and stands
- Easy to move, narrow frame fits through standard 36" doorway
- 1Ø or 3Ø NEMA 3R 480V or 600V 60Hz ventilated transformer
- NEMA 3R load center with GFCI protection, sized per transformer
- NEMA 3R fused primary disconnect, sized per transformer



Boiler Light

- Boiler lights can fit through a sight hole of 1.8" in diameter and larger
- 500 watt tungsten light at 8800 lumens
- Curved handle is optional for greater mobility
- 120 volt operation
- Welded steel cage protects bulb
- Grounded metal tube handle
- Not recommended for hazardous locations
- Couple with inline GFCI for confined space use
- LED options are available upon request



Industrial Grade String Lights

- UL and CSA listed
- 3-, 4-, and 5-wire options
- Meets OSHA, NEC/CEC compliance
- Full threaded screwshell to ensure proper contact
- Available in 50 ft. and 100 ft. options
- Comes standard with watertight NEMA plug and connector



2600 Series Explosion Proof String Lights and Hand Lamps

- cETLus listed
- Class I & II, Div 1 & 2, Groups C, D, F and G
- Non-sparking aluminum guard
- Non-conductive, high impact glass reinforced handle
- Resistant to heat up to 300° F and withstands chemicals, acids and chipping




Optional Low Voltage

- cETLus listed
- Low voltage LED bulb
- Transformer - 120 VAC 60Hz to 12VAC stepdown, rated 400VA
- Class I & II, Div 1 & 2, Groups C, D, F & G



LED Wide Area Work Light

- cULus listed for U.S. and Canada
- Outdoor and wet location rated
- Strong integral mounting magnet
- LED efficient lighting technology
- 50,000-hour lamp life expectancy
- Standard models come wired with NEMA 5-15 plugs
- Optional feed-thru connectivity via secondary cable or receptacle with flip cover
- Driver located in main body
- Low temperature start at -30°C
- Color temperature 5000 Kelvin

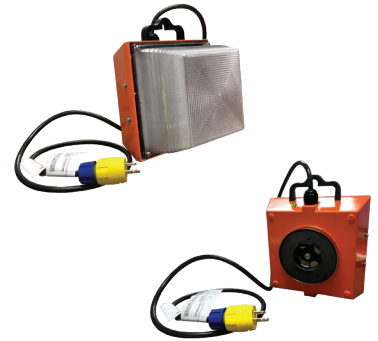

SmartMonitor™ Ground Continuity Monitoring Cordset

- cULus listed for U.S. and Canada
- Manufactured using heavy duty SOW cord for maximum durability and longevity
- Factory assembled to meet the most demanding industrial and construction applications
- Available with Ericson's Perma-Tite®, Perma-Link®, or Perma-Grip® plugs and connectors



Perma-Tite®2 Water Tight Wiring Devices

- UL and CSA listed
- Rated up to NEMA 6P
- Completely water tight wiring devices



TuffTraxx Cable Protection

- NEC / OSHA compliance
- Lifetime warranty
- Industry leading load ratings up to 50,000 lbs. per axle
- Industrial and Extreme duty styles
- Constructed from lightweight polyurethane
- Flexible design for easy setup and transportation
- Operating temperature range is -40° F to 120° F / -40° C to 49°C

